

Hempatop Finish 850 MS

Engineered for premium durability

Product description

Hempatop Finish 850 MS is a two component, high performance polyurethane topcoat formulated without the use of exempt solvents for spray usage in areas requiring VOC as low as 3.5 lbs/US gallon [420 g/L]. It delivers exceptional color and gloss retention with excellent resistance to chemicals for hard wearing, long lasting good looks.

An environmentally friendly coating with high solids content, low VOC, HAPS free, TIN free, and ready to spray from the container without thinning.

Hempatop Finish is easy to apply without thinning, using standard spray equipment. Quick dry to touch, it can be recoated for a longer period of time with no preparation needed. The extended pot life gives you the advantage of increased productivity.

Typical applications

Hempatop Finish 850 MS is designed for use on heavy duty equipment, trucks, trailers and bulk tanks that require a durable, high gloss, premium appearance.


- ✓ Mixing ratio: 5:1 - 6:1 depending on color
- ✓ Base 55H19: curing agent 97050

| Features | Benefits |
|--|---|
| HAPS and TIN free | Meets health and safety requirements |
| Low VOC | Meets legislative requirements |
| Fast drying | Increased productivity |
| Extended pot life | Extended application time |
| Robust application | Works well with all types of spray equipment |
| Excellent color retention and gloss finish | Meets OEM specifications |
| Exceptional chemical resistance | Durable protection against chemical spills and splashes |



Typical specification

Typical paint system:

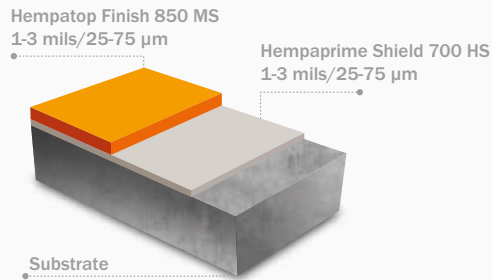

Additional products including 3 layer systems are available. Consult your Hempel technical representative for approved topcoats.



| Physical constants | |
|-----------------------------|---|
| Shade nos/colors: | 00010/White, Custom |
| Finish: | Gloss range low to high |
| Volume solids, %: | 53 +/- 1 |
| Viscosity when mixed: | 20 - 40 seconds #4 Din cup |
| Theoretical spreading rate: | 850 sq.ft./US gallon [20.8 m ² /L] 1.0 mils/25 micron |
| Flash point: | 77°F/25°C |
| Specific gravity: | 8.64 lbs/US gallon [1.035 kg/L] |
| Dry to touch: | 1 hour 77°F/25 °C |
| VOC content: | 3.5 lbs/US gallon [420 g/L] |
| Pot life: | 2-4 hours after mixing [77°F/25 °C] |

The physical constants stated are nominal data according to the Hempel Group's approved formulas. They are subject to normal manufacturing tolerances. This product should be used with reference to the technical specifications.



Certificates and approvals

✓ Tested and approved according to OEM specifications

Hempel North America Corporate Office
 600 Conroe Park North Dr., Conroe, TX 77303
 Tel: +1 (936) 523-6000 Email: hempel.us@hempel.com
north-america.hempel.com